


KMSH-RO

High Pressure Multistage Pump for Reverse Osmosis Systems

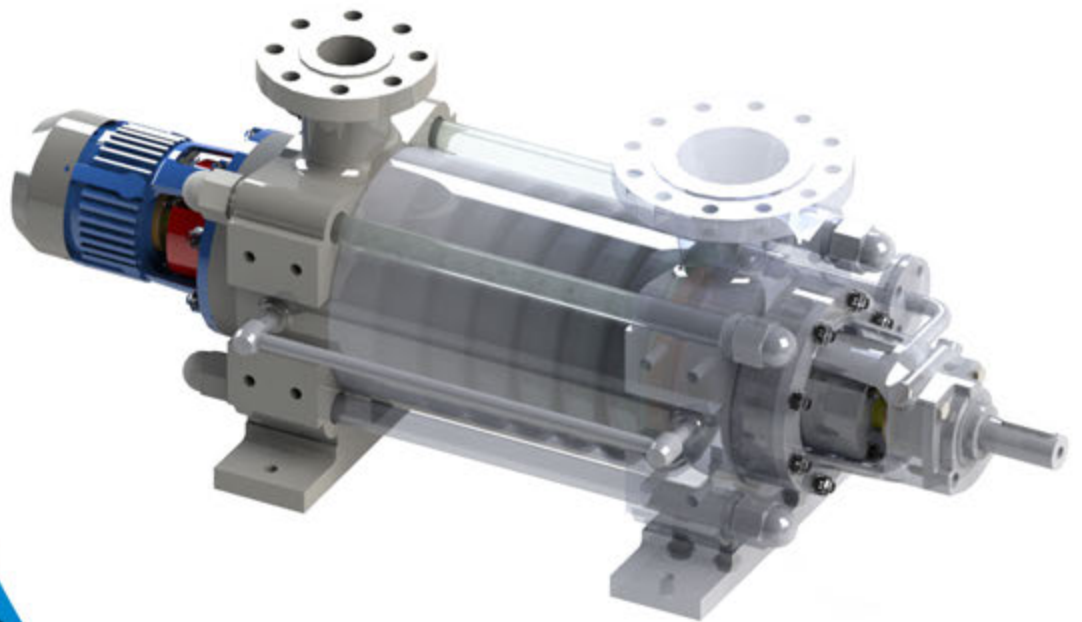

Engineering and Manufacturing of Centrifugal Pumps

Description

KMSH-RO pumps are horizontal multistage of radially split and between bearing design. These series could be categorized in ring section or segmental-ring pumps which meet the technical requirements of ISO5199/EN25199 standards.

Main Application

To handle clean or slightly contaminated salty water

To use in desalination plants of seawater and brackish water via Reverse Osmosis (RO) process.

Construction

KMSH-RO covers 8 sizes, each having various hydraulic internals. In order to enable the pumps work in required duty points, standardized casings are developed to install different hydraulic impeller and diffuser sizes. Optimal selection of impeller diameter and diffuser size for each ensures that the pump closely matches the required duty conditions. Thanks to the advanced modular design of KMSH-RO pumps, there is a maximizing interchangeability besides reduction in the number of parts.

Technical Data

Capacity	up to 900 m ³ /h
Head	up to 850 m
Discharge pressure	up to 100 bar
Speed (Max)	3600 rpm
Type of handled fluid	Seawater, Salty water, Brackish water, Chilled water

Mating dimensions for flanges	Suction casing: DIN 2501-PN16/25, DN 65 to 200 (**)
	Discharge casing: DIN 2501-PN100, DN 40 to 150 (**)
	** ASME B 16.5 is available on request.

Designation

Example: **KMSH-RO 80-1000/7.SD.**

Designation guide	
Pump type	KMSH-RO
Discharge nominal diameter	80
Appropriate RO capacity (m ³ /day)	1000
Number of stages	7
Material of construction	SD

KMSH-RO impellers are produced via precision investment casting, using also lost wax technology and then thoroughly cleaned and polished, in order to achieve high levels of efficiency and reach the nearest output to the theoretical design.



KMSH-RO


Pump Selection Guid

Item	Package Product Capacity m ³ /Day*	Recommended Pump Model
1	5000	KMSH-RO-150-5000
2	4000	KMSH-RO-150-4000
3	2500	KMSH-RO-150-2500
4	2000	KMSH-RO-125-2000
5	1500	KMSH-RO-125-1500
6	1000	KMSH-RO-80-1000
7	500	KMSH-RO-80-500
8	250	KMSH-RO-40-250

* More capacities are available on request.


Thanks to KEC specialized experiences in the field of RO systems, KMSH-RO pumps has been developed to use in different ranges of RO product capacities from 250 m³/day to 5000 m³/day. It is a great chance for KEC that has the capability to match these pumps with customer requests. Our coverage ranges and performance curves are available to check with consumer needs. In addition, in order to prepare technical offers for wide variety of RO projects, KEC experts are ready to respond to the customer requests.

Coverage Curve

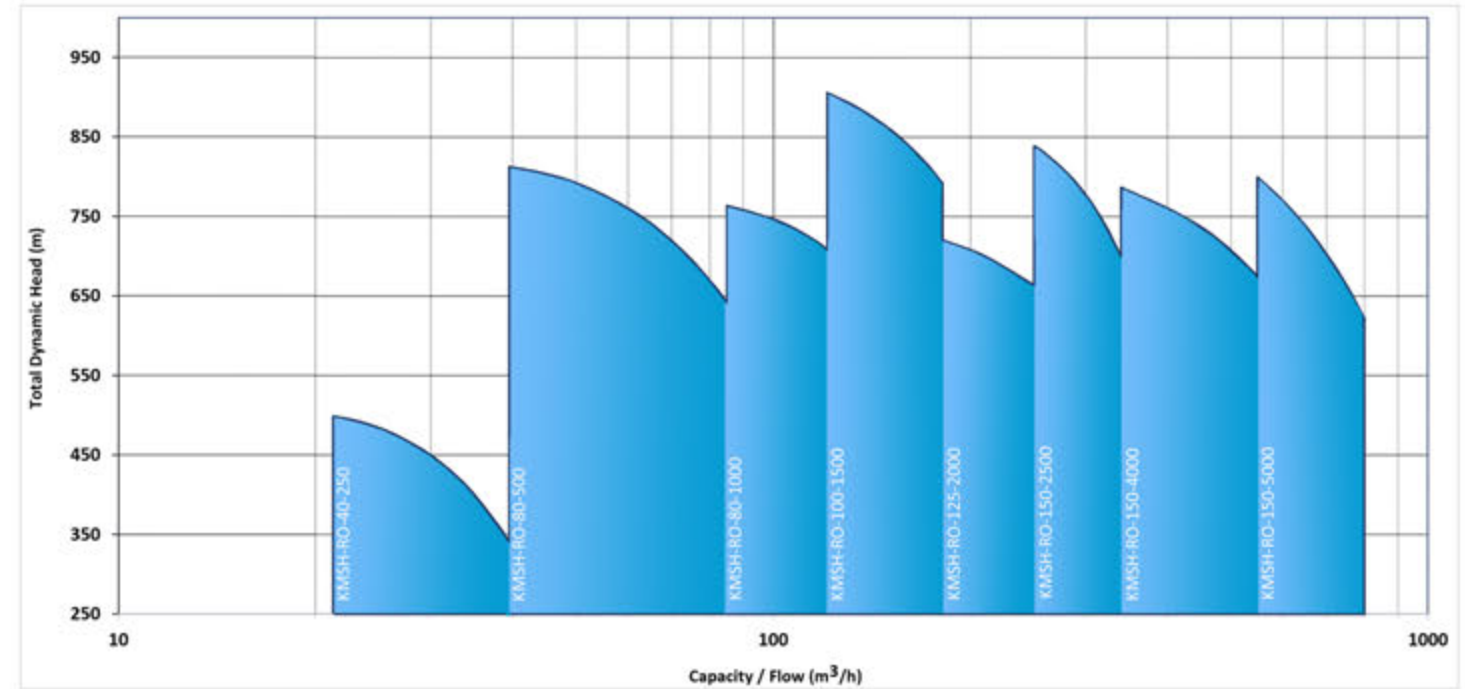

Material Table

Position	Part Name	Material of Construction (MOC)		
		Austenitic (A)	Duplex (D)	Super duplex (SD)
1	Suction casing	1.4408	1.4468	1.4469
2	Discharge casing	1.4408	1.4468	1.4469
3	Stage casing	1.4408	1.4468	1.4469
4	Intermediate impeller	1.4408	1.4468	1.4469
5	Suction impeller	1.4408	1.4468	1.4469
6	Diffuser	1.4408	1.4468	1.4469
7	Shaft	1.4462	1.4462	1.4462
8	Wear rings	SS / PEEK	SS / PEEK	SS / PEEK
9	Balance disc	1.4462	1.4462	1.4410
10	Balance disc seat	1.4404	1.4462	1.4410
11	Balance drum	1.4404	1.4462	1.4410
12	Balance bush	1.4404	1.4462	1.4410
13	Stuffing box housing	1.4408	1.4468	1.4469
14	Bearing housing	JL 1040	JL 1040	JL 1040
15	Shaft sleeve	1.4404	1.4462	1.4410
16	Plain bearing (in Axial suction design)	SiC/SiC	SiC/SiC	SiC/SiC
17	Tie bolt	1.7225 (42CrMo4)	1.6582	1.6582

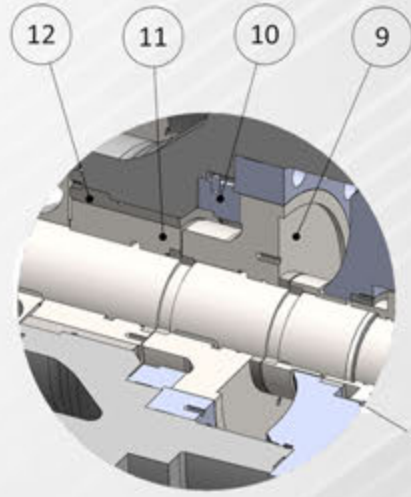


Axial Thrust Balancing System

Axial thrust balancing system has been designed based on hydraulic effects of balance disc, balance drum or a combination of them, which ensures the axial stability of rotor and minimizes the thrust loads transferred to the bearings. The balancing line is returned to the suction casing or in the upstream vessel.



NPSHr Improvement

In order to decrease the Required Net Positive Suction Head (NPSHr), KEC has developed a different design for suction Impeller alongside axial suction construction.

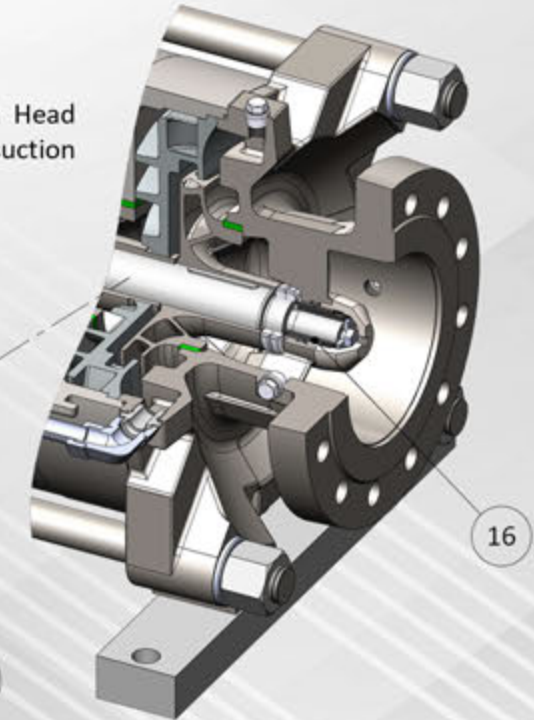


Suction Design

The Suction casing is available in standard axial flanges to cover the customer's requirements. A plain bearing is used in axial suction construction with SiC material for sliding parts.

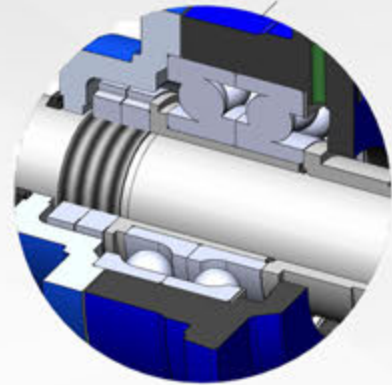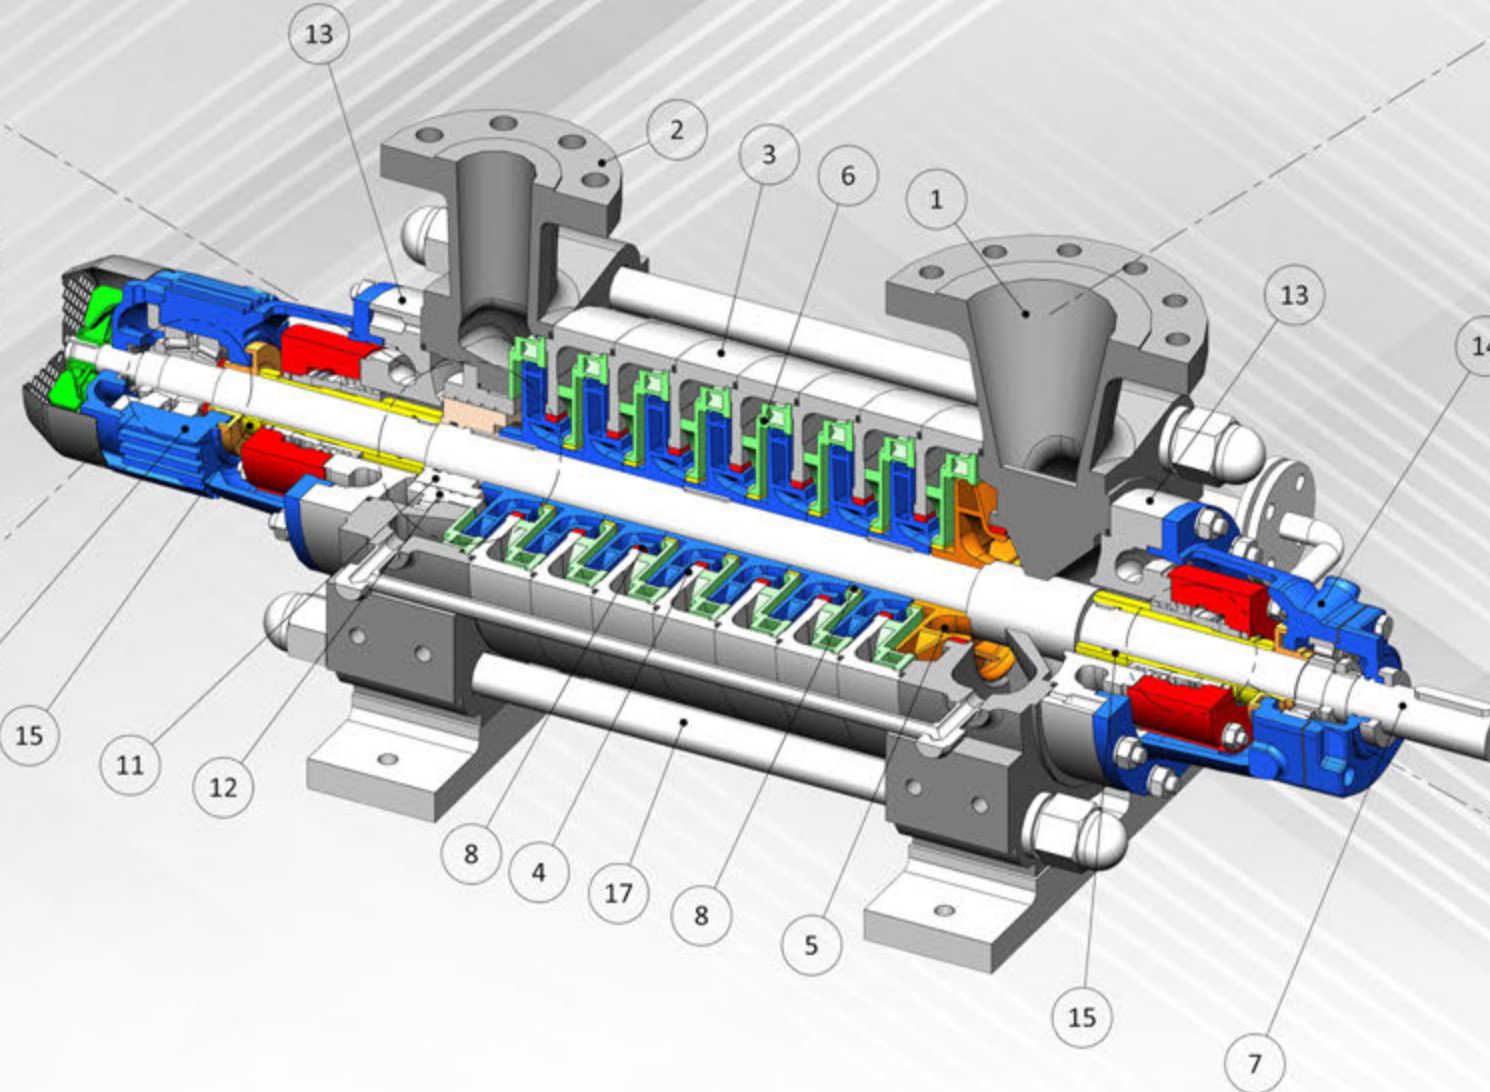

Bearings


Based on the hydraulic design of pump and axial thrust system various types of the bearing are used to absorb radial loads and residual thrust. In balance disc design, roller bearings are used in bearing housings and for balance drum design, thrust bearings (taper roller or angular contact ball bearings) are used in discharge side bearing housing.

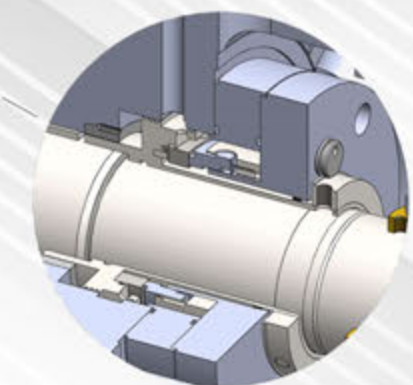


Sealing system

Different types of mechanical seals from major manufacturers can be installed according to the application and discharge pressure. Due to the separate bearing bracket and seal housing, it is easy to change the shaft seal without the need to dismantle hydraulic parts.


KMSH-RO-40-250

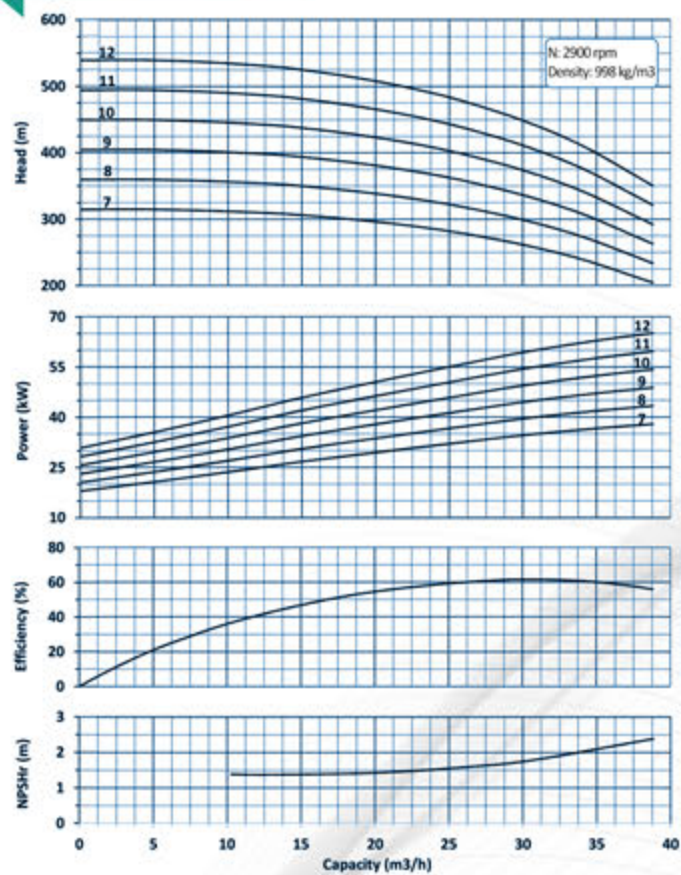


KMSH-RO-80-500

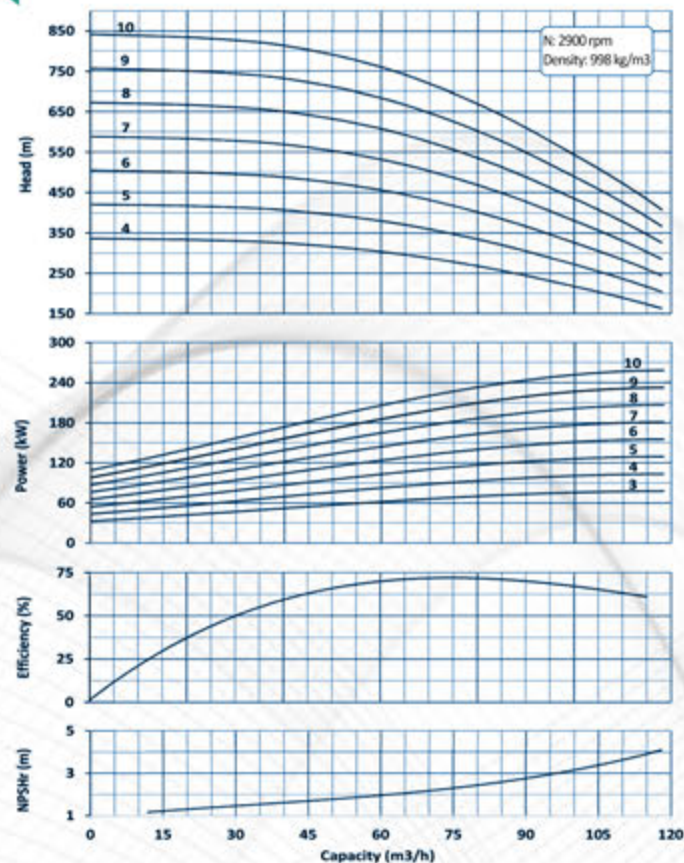


KMSH-RO-125-2000

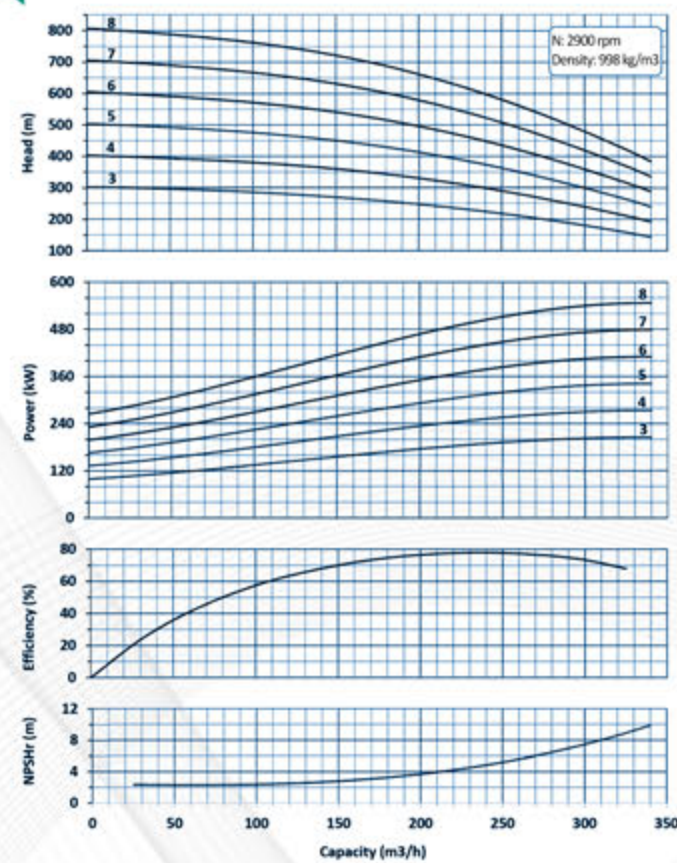


KMSH-RO-150-2500

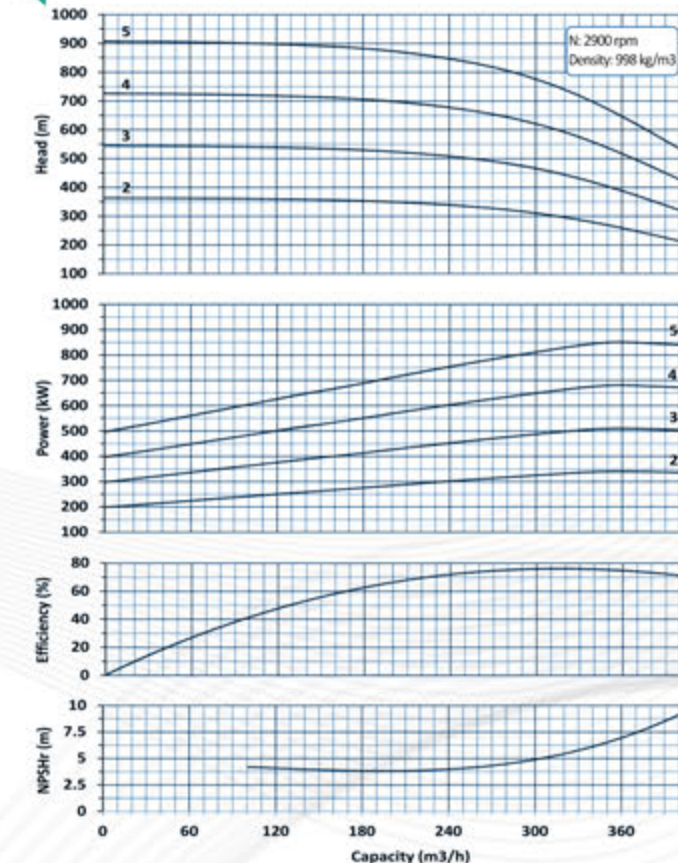


KMSH-RO-80-1000

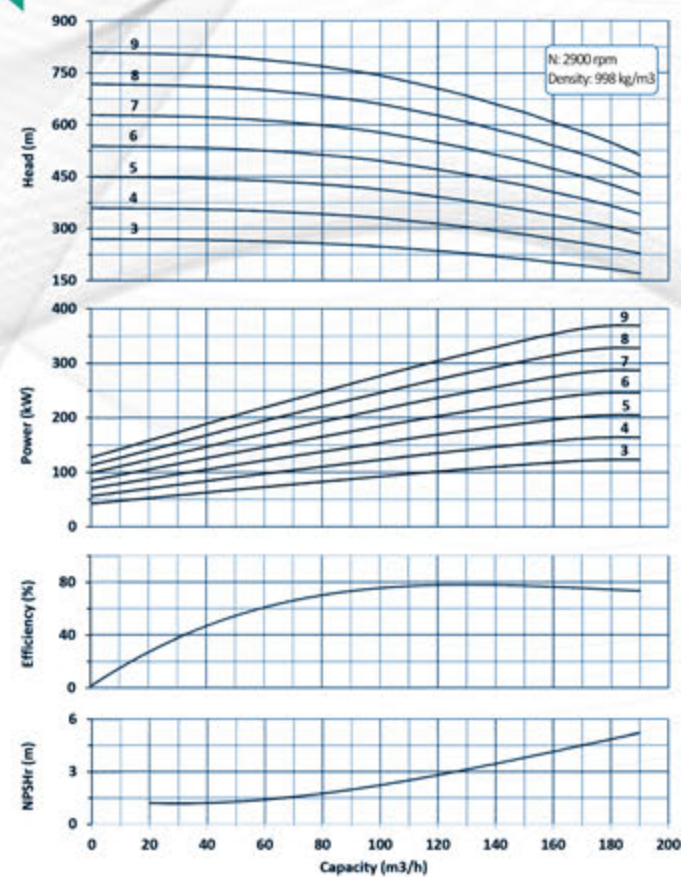


KMSH-RO-100-1500

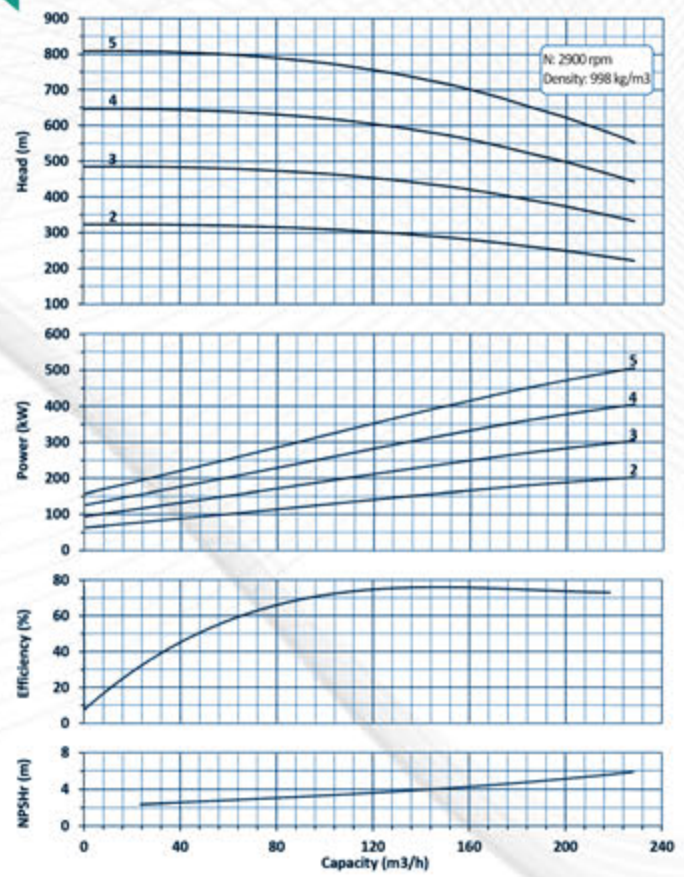

KMSH-RO-150-4000

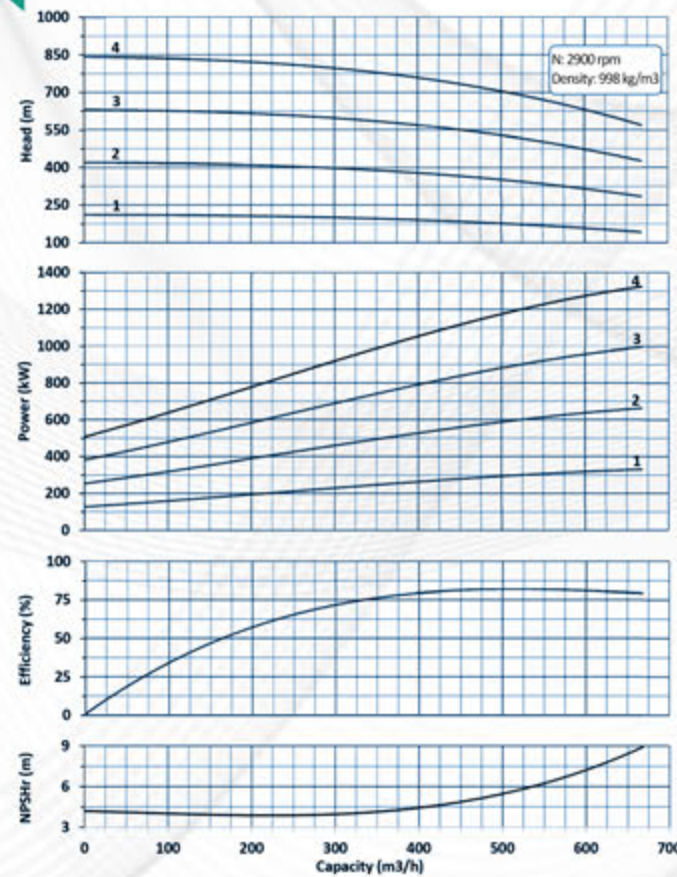

KMSH-RO-150-5000

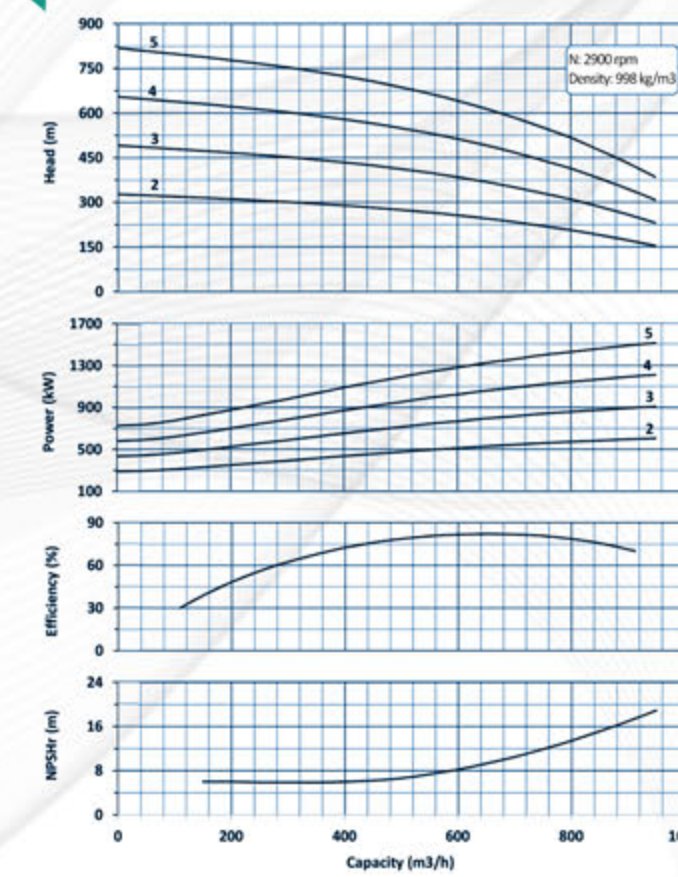



Khavar Toos Engineering Company (KEC)

Address: Khorasan Science and Technology Park

Phone : +98 513 542 5460, +98 513 853 9740

Fax: +98 513 852 7381

Email: info@khavar.com

Website: www.khavar.com

Instagram: @Khavar.Engineering.Co

Linkedin: Khavar Engineering Co (KEC)

(<https://www.linkedin.com/company/khavar/>)